

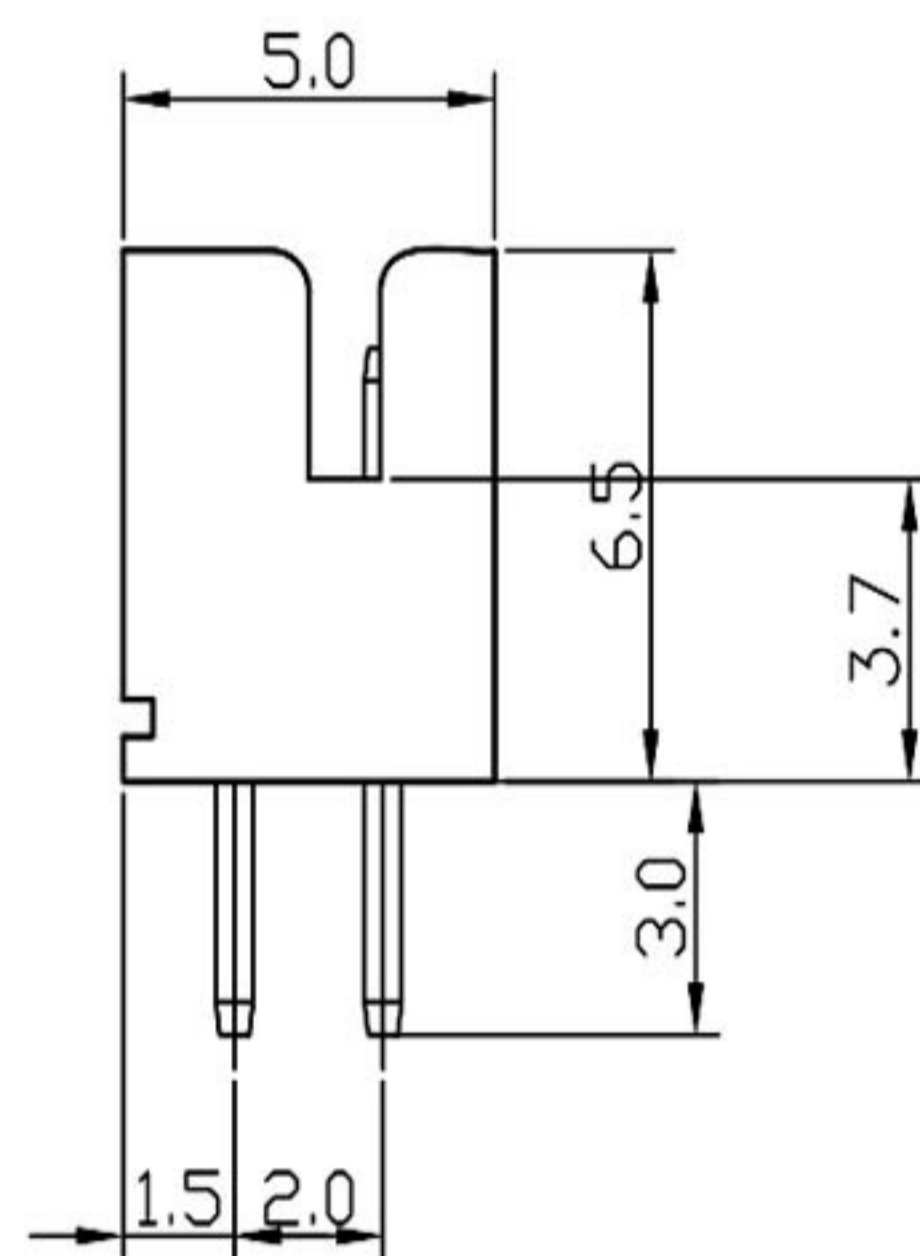


Specification

Current Rating: 2A AC DC
 Voltage Rating: 250V AC, DC
 Operating Temp: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Terminal Material: Brass/ Tin-plated/ Gold-plated
 Material: Nylon 66, UL 94V-0+GF

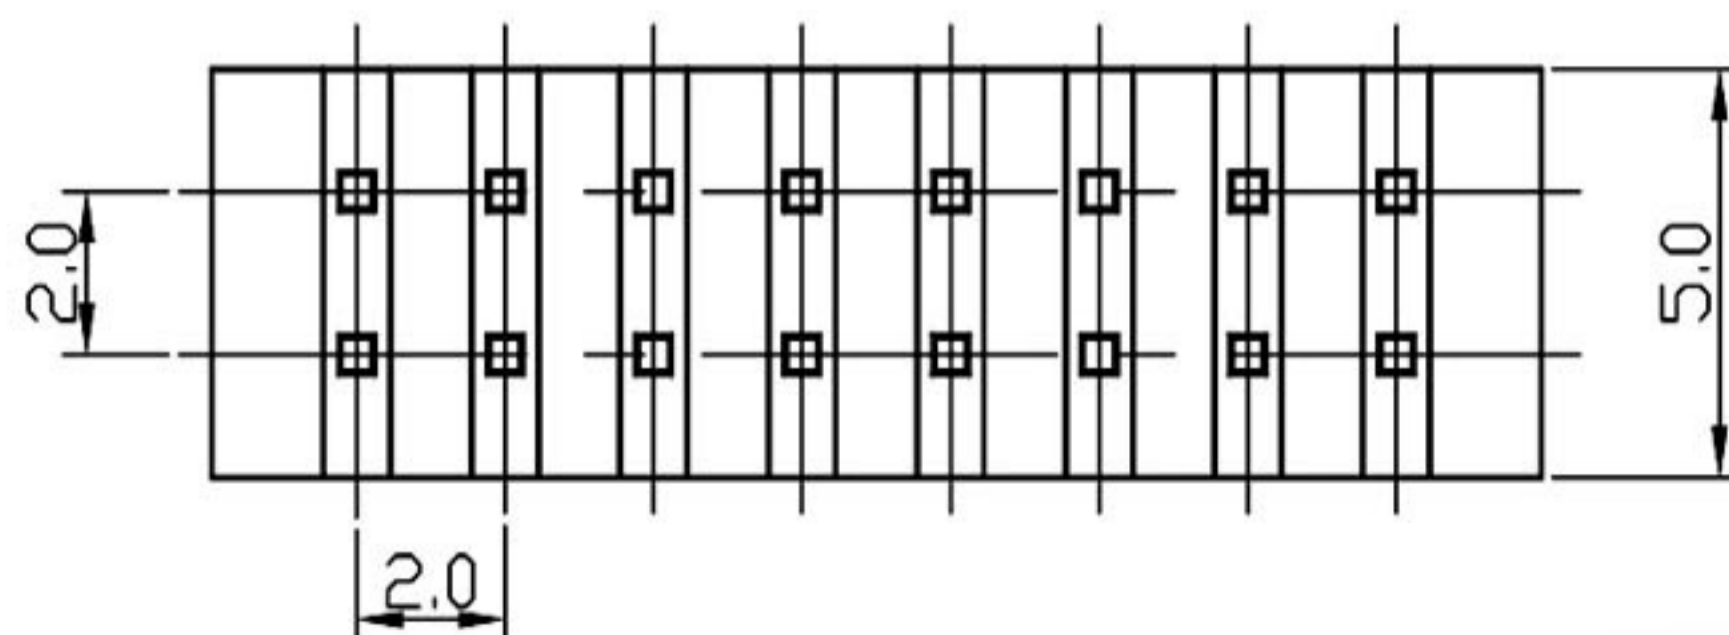

Poles	Dimension mm (in.)		Note.
	A	B	
4	2.0	6.0	
6	4.0	8.0	
8	6.0	10.0	
10	8.0	12.0	
12	10.0	14.0	
14	12.0	16.0	
16	14.0	18.0	
18	16.0	20.0	
20	18.0	22.0	
22	20.0	24.0	
24	22.0	26.0	
26	24.0	28.0	
28	26.0	30.0	
30	28.0	32.0	
32	30.0	34.0	
34	32.0	36.0	
40	38.0	42.0	

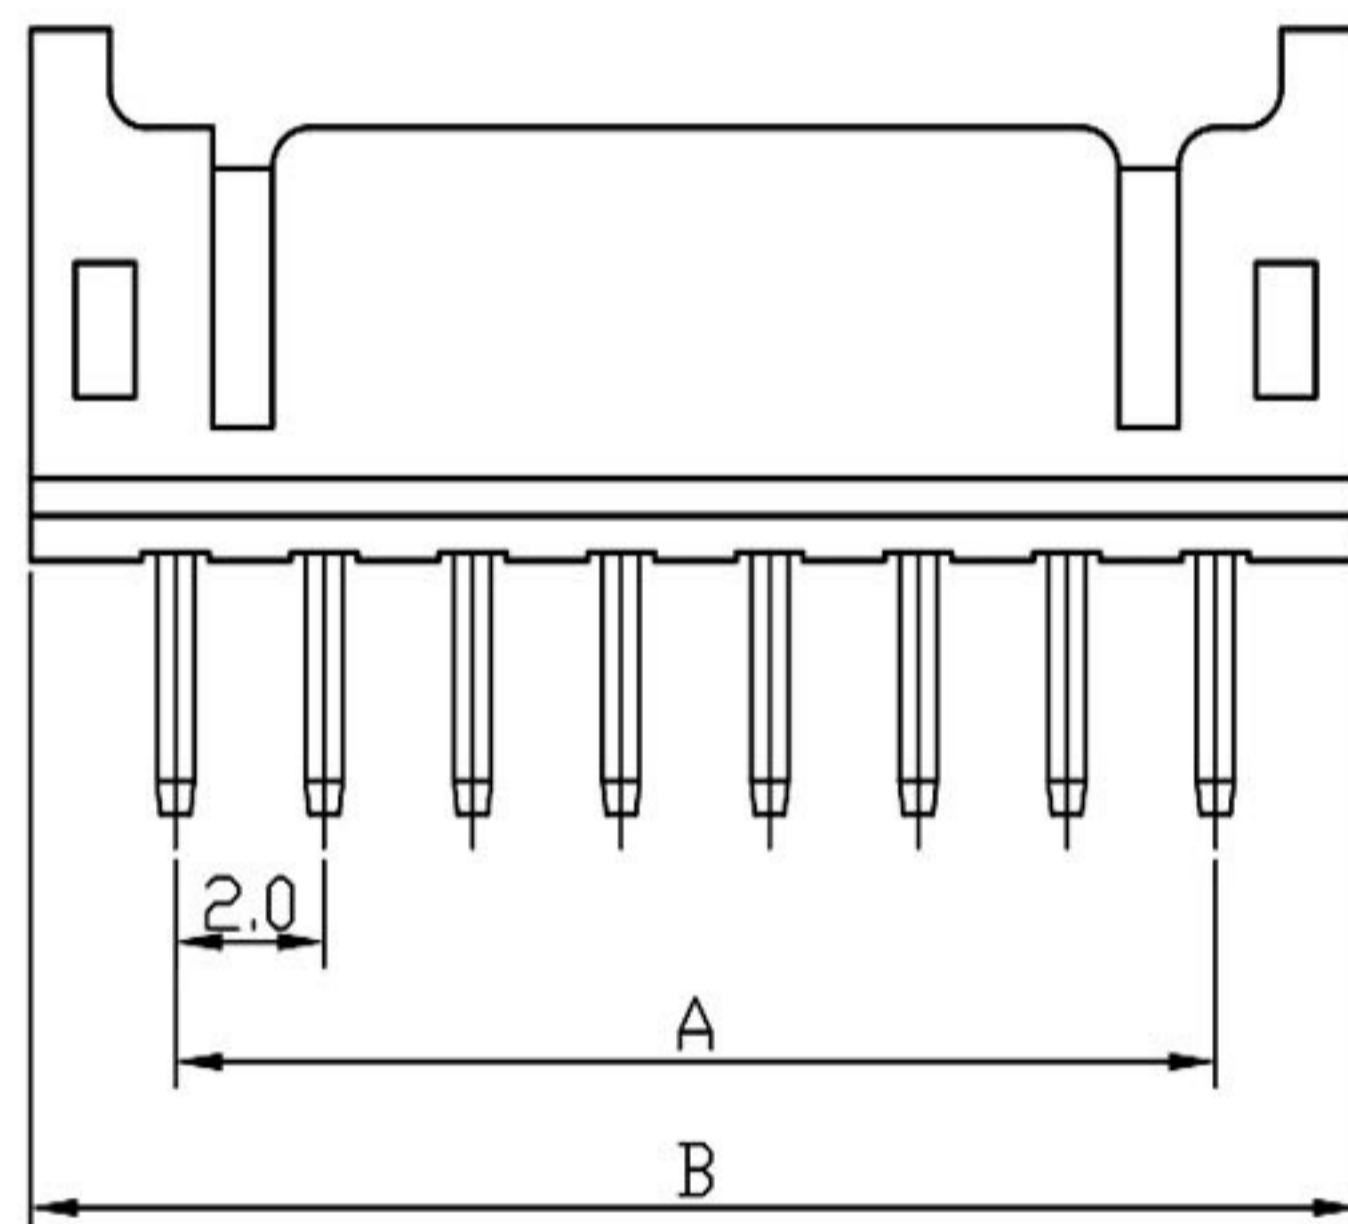

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2012/7/27	SCALE 比例 UNIT 單位 M M PAGE 張數 1 OF 1	TOLERANCE 容許公差 .0 ± .00 ± ANG. ± SIZE 紙張尺寸 A 4 REV. 版本 A	PART NAME 品名 JST PHD 2.0mm WAFER STRAIGHT 2X??P WHITE ROHS PART NO. 料號 W2103-XXPDSXXWR