


30	29.00	31.20	35.00
29	28.00	30.20	34.00
28	27.00	29.20	33.00
27	26.00	28.20	32.00
26	25.00	27.20	31.00
25	24.00	26.20	30.00
24	23.00	25.20	29.00
23	22.00	24.20	28.00
22	21.00	23.20	27.00
21	20.00	22.20	26.00
20	19.00	21.20	25.00
19	18.00	20.20	24.00
18	17.00	19.20	23.00
17	16.00	18.20	22.00
16	15.00	17.20	21.00
15	14.00	16.20	20.00
14	13.00	15.20	19.00
13	12.00	14.20	18.00
12	11.00	13.20	17.00
11	10.00	12.20	16.00
10	9.00	11.20	15.00
9	8.00	10.20	14.00
8	7.00	9.20	13.00
7	6.00	8.20	12.00
6	5.00	7.20	11.00
5	4.00	6.20	10.00
4	3.00	5.20	9.00
3	2.00	4.20	8.00
CKT	DIM A	DIM B	DIM C

NOTE:
1.MATERIAL:
INSULATOR: L.C.P. (UL 94V-0)
COVER: L.C.P.
TERMINAL: PHOSPHOR BRONZE
Ambient Temperature Range: -40 degree to +105 degree

Electrical

Item	Requirement	Test Condition
Rated Voltage	50V(ac/dc)	
Rated Current	0.5Amp(ac/dc)	
Contact Resistance	20mΩ	Mate connectors measure by dry circuit 20mV max, 10mA.
Insulation Resistance	500MΩ	Mate connectors, apply 500V dc between adjacent terminal or ground.
Dielectric Strength	No Breakdown	Mate connectors, apply 500V ac for 1 minute between adjacent terminal or ground.

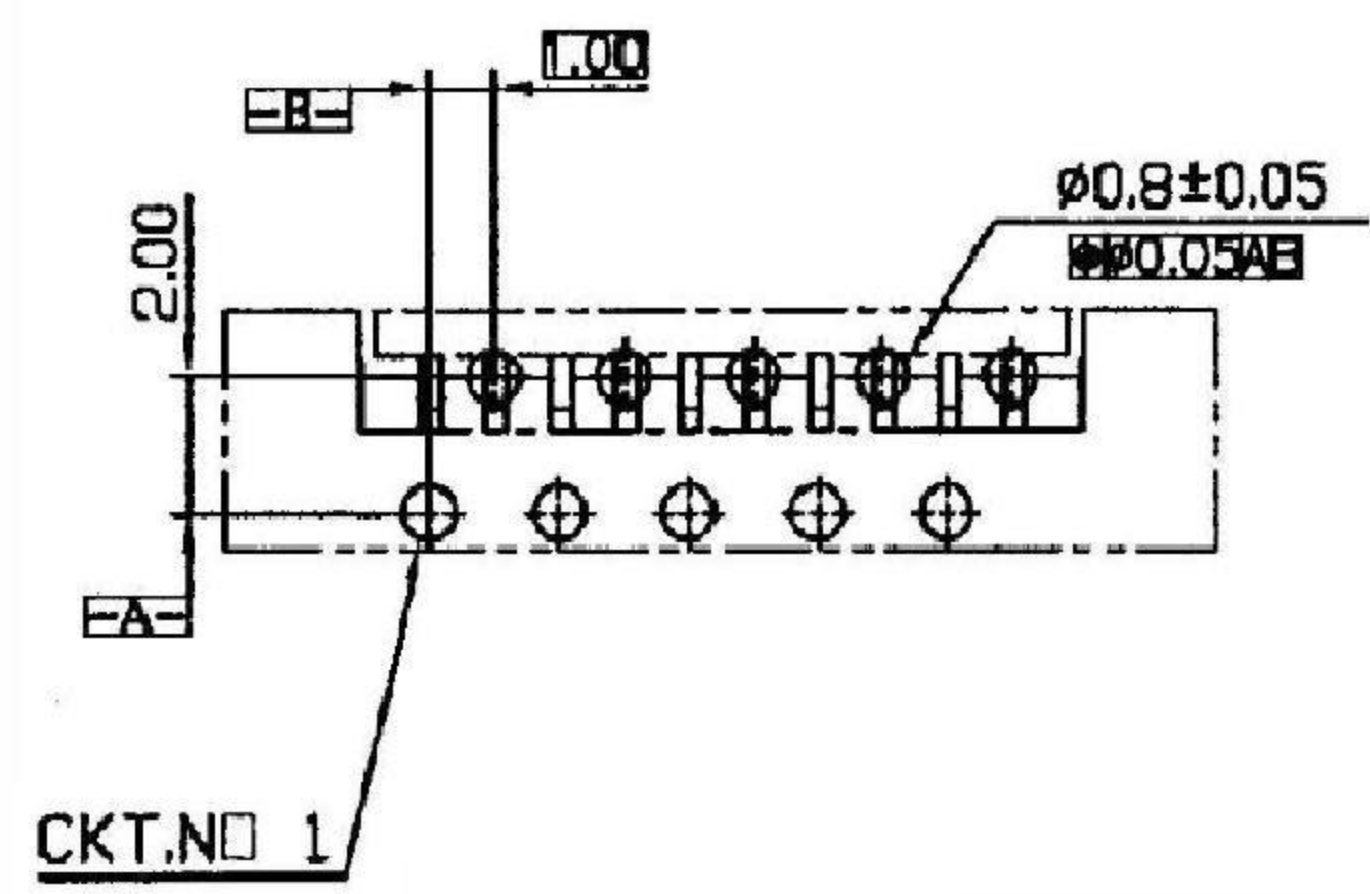

PC BOARD LAYOUT:
COMPONENT SIDE

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考 UNIT 單位 M M DATE 制表日 2012/08/16	TOLERANCE 0.0 ±0.25 0.00 ±0.20 0.000 ±0.10 Angle: ±3°	PART NAME 品名 FPC/FFC ZIF 1.0mm DIP 180 XXP TIN PLATING TUBE PACKING IVORY COLOR ROHS
DWG. 製圖 Karen		SIZE 紙張尺寸 A 4 PAGE 張數 1 OF 1 REV. 版次 C	PART NO. 料號 C3918-XXSATT10R