

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 23/06/05		

NOTES:




1. SPECIFICATIONS

- . Contact Resistance: 30mΩ max
- . Insulator Resistance: 1000MΩ min.
- . Current Rating: 30V DC 1.5 A max
- . Dielectric withstanding voltage: AC500V For 1 minute
- . Contact: Copper alloy
- . Housing: PBT.

2. PRODUCT NUMBER CODE:

DS1108 - X X X

- Contact plating
 - 0: selective gold flash
 - C 3u" gold
 - 3: 30u" gold
- Shell plating
 - 6: tin
 - N: nickel
 - 8: full gold
- Color of housing
 - W: white
 - B: black

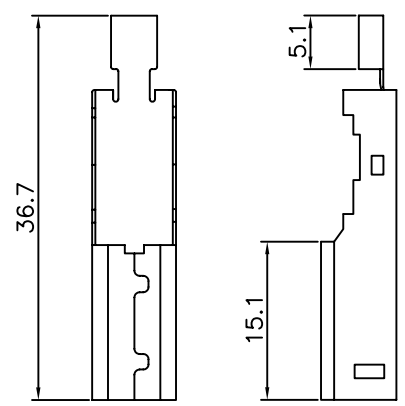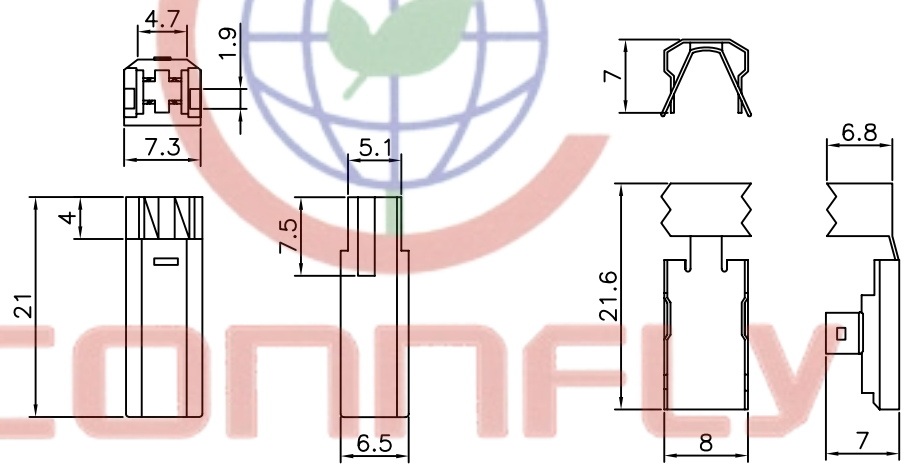

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	UNITS	mm
.X ±0.38	.X ±3°	SHEET SIZE	A4
.XX ±0.25	.XX ±2°	SERIES	DS1108
DRAWING TYPE	CUSTOMER	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	
SCALE	1:1		
DRAWING NO.	C-DS1108-XXX		